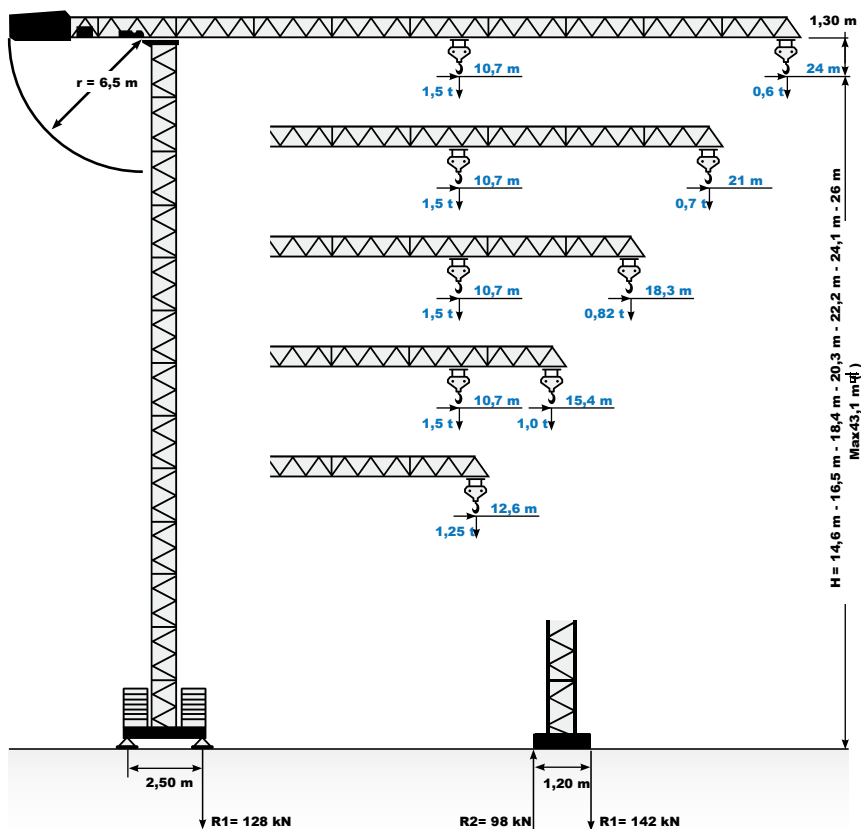


FC 6.24H

Gru centro storico - FC 6.24H




Diagramma di portata







	1,5 t →	10,70 m	t	10,70 m	12,60 m	14,10 m	15,40 m	16,80 m	18,30 m	21,10 m	24 m
				1,50	1,25	1,10	1,00	0,90	0,82	0,70	0,60

Lunghezza braccio (m)	Contrappeso (t)	H max (m)	Zavorra Base (t)
24,00	2,80	14,60	11,36
21,10	2,40	16,50 - 18,40	12,78
18,30	2,10	20,30 - 22,20	14,20
15,40	1,80	24,10	15,62
12,60	1,55	26,00	17,04







Trasporto

FC 6.24H	DESCRIZIONE	LUNGHEZZA	LARGHEZZA	ALTEZZA	QUANTITÀ	PESO
	UNDERCARRIAGE	1,35 m	1,35 m	0,50m	1	350 kg
	UNDERCARRIAGE SUPPORT	1,00 m	0,41 m	0,25 m	4	90 kg
	UNDERCARRIAGE AND UNDERCARRIAGE SUPPORT	2,00 m	2,00 m	0,50 m	1	710 kg

Tower

	TOWER SECTION	1,92 m	0,89 m	0,80 m	1	260 kg
	TOWER SECTION	1,92 m	0,89 m	0,80 m	6-21	175 kg
	TOWER SECTION	0,97 m	0,89 m	0,80 m	1	110 kg
	SLEWING UNIT	1,10 m	1,05 m	0,50 m	1	400 kg

Upper Part

	COUNTERWEIGHT	2,45 m	0,75 m	1,22 m	1	310 kg
	COUNTERJIB	2,50 m	1,02 m	0,85 m	1	310 kg 200 kg
	JIB SECTION	2,82 m	0,76 m	0,90 m	1	250 kg
	JIB SECTION	3,11 m	0,75 m	0,90 m	2	150 kg
	JIB SECTION	3,10 m	0,75 m	0,90 m	5	110 kg
	JIB SECTION	4,25 m	0,75 m	0,86 m	1	100 kg